



150 MHz Mixed Signal CombiScope® HM1508-2


HM1508-2

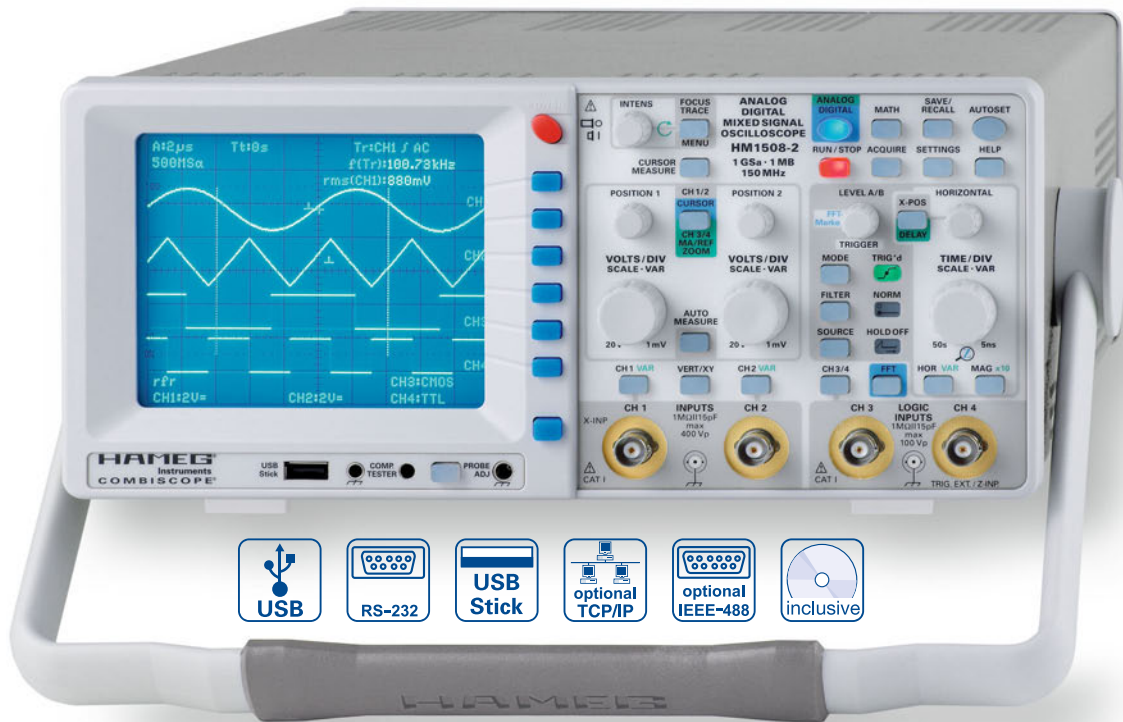


DSO mode:
4-channel display of 2
analog and 2 logic signals



DSO mode: Signal portion
expanded with zoom
(burst in one line)



Frequency Analysis
with FFT



- 1GSa/s Real Time Sampling, 10GSa/s Random Sampling
- 1MPts Memory per Channel, Memory Zoom up to 50,000:1
- FFT for spectral analysis
- 4 Channels (2 analog, 2 logic inputs)
- Deflection coefficients 1mV/div....20V/div.,
Time Base 5 ns/div....50 s/div.
- 8-Bit Low Noise Flash A/D Converters
- Acquisition modes: Single, Refresh, Average, Envelope,
Roll, Peak-Detect
- Front USB-Stick Connector for Screenshots
- USB/RS-232, optional: IEEE-488 or Ethernet/USB
- Signal display: Yt, XY and FFT;
Interpolation: Sinx/x, Pulse, Dot Join (linear)
- See HM1500-2 for analog mode

150 MHz Mixed Signal CombiScope® HM1508-2

All data valid at 23 °C after 30 minute warm-up

Vertical Deflection

Channels:	
Analog:	2
Digital:	2 + 2 Logic Channels
Operating Modes:	
Analog:	CH 1 or CH 2 separate, DUAL (CH 1 and CH 2 alternate or chopped), Addition
Digital:	Analog Signal Channels CH 1 or CH 2 separate, DUAL (CH 1 and CH 2), Addition Logic Signal Channels: CH 3 and CH 4
X in XY-Mode:	CH 1
Invert:	CH 1, CH 2
Bandwidth (-3 dB):	2x0...150 MHz
Rise time:	< 2.3 ns
Bandwidth limiting (selectable):	approx. 20 MHz (5 mV/div...20 V/div.)
Deflection Coefficients(CH 1,2): 14 calibrated steps	
1...2 mV/div. (10 MHz)	± 5% (0...10 MHz [-3 dB])
5 mV...20 V/div.	± 3% (1-2-5 sequence)
variable (uncalibrated):	> 2.5:1 to > 50 V/div.
Inputs CH 1, 2:	
Input Impedance:	1 MΩ 15 pF
Coupling:	DC, AC, GND (ground)
Max. Input Voltage:	400 V [DC + peak AC]
Y Delay Line (analog):	70 ns
Measuring Circuits:	Measuring Category I
Digital mode only:	
Logic Channels:	CH 3, CH 4
Select. switching thresholds:	TTL, CMOS, ECL
User definable thresholds:	3
within the range:	-2...+3V
Analog mode only:	
Auxiliary input:	CH 4: 100 V (DC + peak AC)
Function (selectable):	Extern Trigger, Z (unblank)
Coupling:	AC, DC
Max. input voltage:	100 V (DC + peak AC)

Triggering

Analog and Digital Mode	
Automatic (Peak to Peak):	
Min. signal height:	5 mm
Frequency range:	10 Hz...250 MHz
Level control range:	from Peak- to Peak+
Normal (without peak):	
Min. signal height:	5 mm
Frequency range:	0...250 MHz
Level control range:	-10...+10 div.
Operating modes: Slope/Video/Logic	
Slope:	Rising, falling, both
Sources:	CH 1, CH 2, alt. CH 1/2 (≥ 8 mm, analog mode only), Line, Ext.
Coupling:	
AC:	10 Hz...250 MHz
DC:	0...250 MHz
HF:	30 kHz...250 MHz
LF:	0...5 kHz
	Noise Rej. switchable
Video:	
Standards:	pos./neg. Sync. Impulse 525 Line/60 Hz Systems 625 Line/50 Hz Systems
Field:	even/odd/both
Line:	all/line number selectable
Source:	CH 1, CH 2, Ext.
Indicator for trigger action: LED	
External Trigger via:	CH 4 (0.3 V _{pp} , 150 MHz)
Coupling:	AC, DC
Max. input voltage:	100 V (DC + peak AC)
Digital mode:	
Logic:	AND/OR, TRUE/FALSE
Source:	CH1 or 2, CH3 and CH4
State:	X, H, L
Pre/Post Trigger:	-100...+400% related to complete memory
Analog mode	
2nd Trigger	
Min. signal height:	5 mm
Frequency range:	0...250 MHz
Coupling:	DC
Level control range:	-10...+10 div.

Horizontal Deflection

Analog mode	
Operating modes:	A, ALT (alternating A/B), B
Time base A:	50 ns/div...0.5 s/div. (1-2-5 sequence)
Time base B:	50 ns/div...20 ms/div. (1-2-5 sequence)
Accuracy A and B:	± 3%
X Magnification x10:	to 5 ns/div.
Accuracy:	± 5%
Variable time base A/B:	cont. 1:2.5
Hold Off time:	var. 1:10 LED-Indication
Bandwidth X-Amplifier:	0...3 MHz [-3 dB]
X Y phase shift < 3°:	< 220 kHz

Digital mode

Time base range (1-2-5 sequence)	
Refresh Mode:	5 ns/div...20 ms/div.
with Peak Detect:	2...20 ms/div. (min. Pulse Width 10 ns)
Roll Mode:	50 ms/div...50 s/div.
Accuracy time base	
Time base:	50 ppm
Display:	± 1%
MEMORY ZOOM:	max. 50,000:1
Bandwidth X-Amplifier:	0...150 MHz [-3 dB]
XY phase shift < 3°:	< 100 MHz

Digital Storage

Sampling Rate (real time):	Analog channels: max. 2 x 500 MSa/s or 1 x 1 GSa/s (interleaved); Logic Channels: 2 x 500 MSa/s
Sampling Rate (random sampling):	10 GSa/s
Bandwidth:	2 x 0...150 MHz (random)
Memory:	2 x 1 MPts (analog); 2 x 1 MPts (logic)
Operating modes:	Refresh, Average, Envelope/Roll: Free Run/Triggered, Peak-Detect
Resolution (vertical):	8 Bit (25 Pts/div.)
Resolution (horizontal):	Yt: 11 Bit (200 Pts/div.) XY: 8 Bit (25 Pts/div.)
Interpolation:	Sin ^x /x, Dot Join (linear)
Delay:	1 Million x 1/Sampling Rate to 4 Million x 1/Sampling Rate
Display refresh rate:	max. 170/s at 1 MPts
Display:	Dots (acquired points only), Vectors (partly interpolated), optimal (complete memory weighting and vectors)
Reference Memories:	9 with 2 kPts each (for recorded signals)
Display:	2 signals of 9 (free selectable)

FFT Mode

Display X:	Frequency Range
Display Y:	True rms value of spectrum
Scaling:	Linear or logarithmic
Level display:	dBV, V
Window:	Square, Hanning, Hamming, Blackman
Control:	Center frequency, Span
Marker:	Frequency, Amplitude
Zoom (frequency axis):	up to x20

Operation / Measuring / Interfaces

Operation:	Menu (multilingual), Autoset, help functions (multilingual)
Save/Recall (instrument parameter settings):	9
Signal display:	max. 4 signals or 4 traces
analog:	CH 1, 2 (Time Base A) in combination with CH 1, 2 (Time Base B)
digital:	CH 1, 2 and CH 3, 4 or ZOOM or Reference or Mathematics
USB Memory-Stick:	
Save/Recall external:	
Instrument settings and Signals:	CH 1, 2 and CH 3, 4 or ZOOM or Reference or Mathematics
Screen-shot:	as Bitmap
Signal display data (2k per channel):	Binary (SCPI-Data), Text (ASCII-Format), CSV (Spread Sheet)
Frequency counter:	
6 digit resolution:	> 1 MHz...250 MHz
5 digit resolution:	0.5 Hz...1 MHz
Accuracy:	50 ppm
Auto Measurements:	
Analog mode:	Frequency, Period, V _{dc} , V _{pp} , V _{p+} , V _{p-}
also in digital mode:	V _{rms} , V _{avg}
Cursor Measurements:	
Analog mode:	Δt, 1/Δt (f), t _r , ΔV, V to GND, ratio X, ratio Y
plus in digital mode:	V _{pp} , V _{p+} , V _{p-} , V _{avg} , V _{rms} , pulse count

Resolution Readout/Cursor:	1000 x 2000 Pts, Signals: 250 x 2000
Interfaces (plug-in):	USB/RS-232 (HO720)
Optional:	IEEE-488, Ethernet/USB

Mathematic functions

Number of Formula Sets:	5 with 5 formulas each
Sources:	CH 1, CH 2, Math 1–Math 5
Targets:	5 math. memories, Math 1–5
Functions:	ADD, SUB, 1/X, ABS, MUL, DIV, SQ, POS, NEG, INV
Display:	max. 2 math. memories (Math 1–5)

Display

CRT:	D14-375GH
Display area (with graticule):	8 div. x 10 div.
Acceleration voltage:	approx. 14 kV

General Information

Component tester	
Test voltage:	approx. 7 V _{rms} (open circuit), approx. 50 Hz
Test current:	max. 7 mA _{rms} (short circuit)
Reference Potential :	Ground (safety earth)
Probe ADJ Output:	1 kHz/1 MHz square wave signal 0.2 V _{pp} (tr < 4 ns)
Trace rotation:	electronic
Line voltage:	105...253 V, 50/60 Hz ± 10%, CAT II
Power consumption:	47 Watt at 230 V, 50 Hz
Protective system:	Safety class I (EN61010-1)
Operating temperature:	+5...+40°C
Storage temperature:	-20...+70°C
Rel. humidity:	5...80% (non condensing)
Dimensions (W x H x D):	285 x 125 x 380 mm
Weight:	5.6 kg

Accessories supplied: Line cord, Operating manual, 4 Probes 10:1 with attenuation ID (HZ200), USB/RS-232 Interface (HO720), Windows Software for control and data transfer

Optionales Zubehör:

HO730	Dual-Interface Ethernet/USB,
HO740	Interface IEEE-488 (GPIB)
HZ13	Interface cable (USB) 1,8m
HZ14	Interface cable (serial) 1:1
HZ20	Adapter, BNC to 4mm banana
HZ33	Test cable 50Ω, BNC/BNC, 0,5m
HZ34	Test cable 50Ω, BNC/BNC, 1m
HZ45	19"-Rackmount Kit 4RU
HZ51	Probe 10:1 (150MHz)

HAMEG Distributor:



MCS Test Equipment Ltd
 Unit 5-6 Station Yard,
 Llanrwst, Conwy,
 North Wales,
 LL26 0EH

Tel: 08453 62 63 65
 Fax: 08453 62 36 16

Email: sales@mcs-testequipment.co.uk
 Web: www.mcs-testequipment.co.uk